


## SPC 5mm XL Vinyl Flooring

February 2025

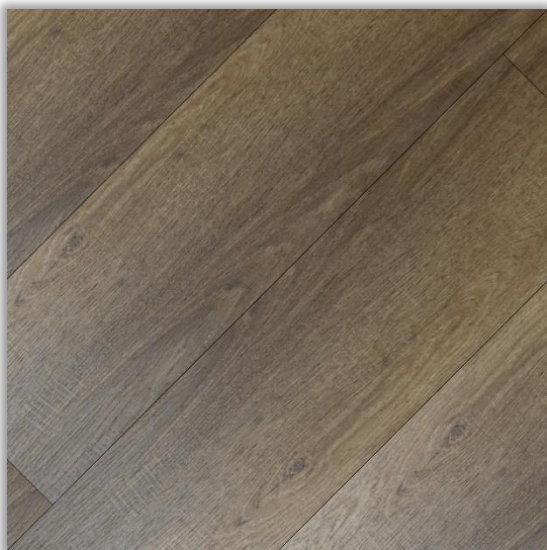

### Characteristics

**Pattern:** 704 Classic Oak

**Product Code:** 993728

**EIR** – Embossed in Register, synchronised wood shaft





**Moisture Resistant:** Yes

**Click System:** Click

**Warranty Commercial:** 10 years

**Warranty Residential:** 35 years

## Technical features

 <b>Dimensions</b>	
<b>Thickness</b>	4mm SPC + 1mm Screen
<b>Wear Layer Thickness</b>	0,50mm
<b>Length</b>	1524mm
<b>Width</b>	223mm
 <b>Technical features</b>	
<b>Density</b>	2.05 g/cm <sup>3</sup> - <b>Norm</b> EN ISO 23996
<b>Resistance to Chemicals</b>	No change
<b>Gloss level</b>	2% - 4% (super matt)
<b>Formaldehyde</b>	< 0.10 g/mm <sup>3</sup> - <b>Norm</b> EN 717-1:2005
<b>Reaction to fire</b>	Bfl-s1 - <b>Norm</b> EN 13501:2010
<b>Slip rate</b>	R10 - <b>Norm</b> DIN 51130:2014
<b>Click Tensile Strength</b>	Max. 430N/50mm - <b>Norm</b> EN 24334
<b>Residual Indentation</b>	≤ 0.5%
<b>Surface Bonding Strength</b>	2.8 N/mm <sup>2</sup>
<b>Boiling Test</b>	No delamination
<b>Abrasion</b>	Class 23 / Class 23 - <b>Norm</b> ISO 10140
<b>Sound Mitigation</b>	> 19 dB
<b>Squareness</b>	≤ 0.05mm - <b>Norm</b> ISO 24337
<b>Straightness</b>	≤ 0.05mm - <b>Norm</b> ISO 24337:10140
<b>Bevel</b>	 V4 - Micro bevel on 4 sides
 <b>Quantity</b>	
<b>Planks per box</b>	7 units
<b>Quantity per box</b>	2,380 m <sup>2</sup>

Technical features according to the manufacturer. All materials commercialised by GLOBALDIS must be installed by a competent technician who complies with the installation standards of the respective product. The guarantee for GLOBALDIS products is subject to compliance with the installation standards indicated.

GLOBALDIS endeavours to constantly improve its offer and therefore reserves the right to make changes to the product range or technical specifications without prior notice.